

Anti-Slip Hi-Traction®
1mm FRP
WALKWAY COVERS

SAFEGUARD
TECHNOLOGY
Leading Manufacturer of Anti-Slip Safety Products



SAFEGUARD 1mm Fiberglass Walkway Covers provide a low profile, lighter alternative to the 1/8" base material version.

Designed for quick and easy installation with the option of pressure sensitive adhesive.




www.safeguard-technology.com

Step Covers | Walkway Covers | Ladder Rung Covers | Pipe & Cable Covers | Roll-Traction® | Anti-Slip Mats | Anti-Slip Tapes

Anti-Slip Hi-Traction® 1mm FRP WALKWAY COVERS

SAFEGUARD® Hi-Traction® 1mm Walkway Covers
Thin profile alternative with peel-and-stick option.

Safeguard® 1mm Walkway Covers are designed for quick and easy installation over existing surfaces including metal, wood, and concrete. These Walkway Covers are not load bearing. Safeguard recommends using a high quality Adhesive or request PSA (Pressure Sensitive Adhesive) laminate for "Peel-and-Stick" installation. Rivets and screws can be used but care must be taken due to the thin profile.

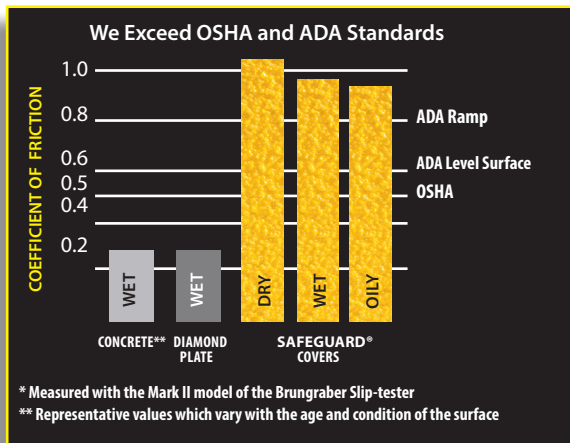

Coefficient of Friction

Safeguard Technology's unique surface nearly doubles both the OSHA's 0.5 and the ADA's 0.6 guidelines for Coefficient of Friction values as confirmed in independent lab testing using the Mark II Model of the Brungraber slip tester. Even in wet or oily conditions, we greatly exceed both of these guidelines.

Colors

The 1 mm FRP Walkway Covers are available in a variety of standard & premium colors as well as Photoluminescent "Glow-in-the-Dark" and custom color matching. Colors can be combined for a two-tone configuration. Incorporate your corporate logo, descriptive messages, and Personal Protection Equipment (PPE) symbols as well.

*See our Colors brochure for complete details.

Sizes

All Safeguard® 1 mm FRP Walkway Covers are cut to your size specifications. The maximum size sheet available with PSA (Pressure Sensitive Adhesive) is 48" x 48." Larger sizes without PSA are available. Please call for details.

Grades


Safeguard® 1 mm FRP Walkway Covers are available in five grades of coarseness to meet your specific application requirements.



Heel and toe pattern creates a Hi-Traction® Anti-Slip Walkway on concrete


Approximate weight in lbs/square foot with & without Pressure Sensitive Adhesive (PSA)

GRADE	Without PSA	With PSA
Super Fine	0.57	0.64
Extra Fine	0.61	0.68
Fine	0.68	0.75
Coarse	0.76	1.20
Extra Coarse	1.14	2.45



Peel and stick with Pressure-Sensitive Adhesive (PSA)

Thickness Comparison Detail

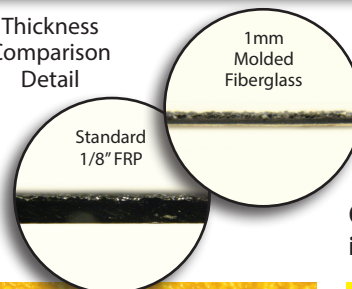

Contact Safeguard Technology for more information or a free sample today.

SAFEGUARD TECHNOLOGY
Leading Manufacturer of Anti-Slip Safety Products

SAFEGUARD TECHNOLOGY INC.
330.995.5200 | 800.989.1695 Toll-Free in the U.S. and Canada
Email: info@safeguard-technology.com
www.safeguard-technology.com

© Copyright 2016 SAFEGUARD TECHNOLOGY INC.
SAFEGUARD® Covers, Hi-Traction®, HiGlo-Traction®, and Roll-Traction® are registered trademarks of SAFEGUARD Technology Inc. REV2_122115

Average Thickness of Finished Product

Grit Coarseness	Super Coarse	Extra Coarse	Coarse	Fine	Extra Fine	Super Fine
Standard 1/8" FRP	0.38" 9.7mm	0.26" 6.6mm	0.19" 4.8mm	0.18" 4.6mm	0.17" 4.3mm	0.16" 4.1mm
1mm Molded Fiberglass	NA	0.12" 3.15mm	0.07" 1.8mm	0.07" 1.7mm	0.06" 1.5mm	0.05" 1.3mm