



# Anti-Slip Hi-Traction® LADDER RUNG COVERS

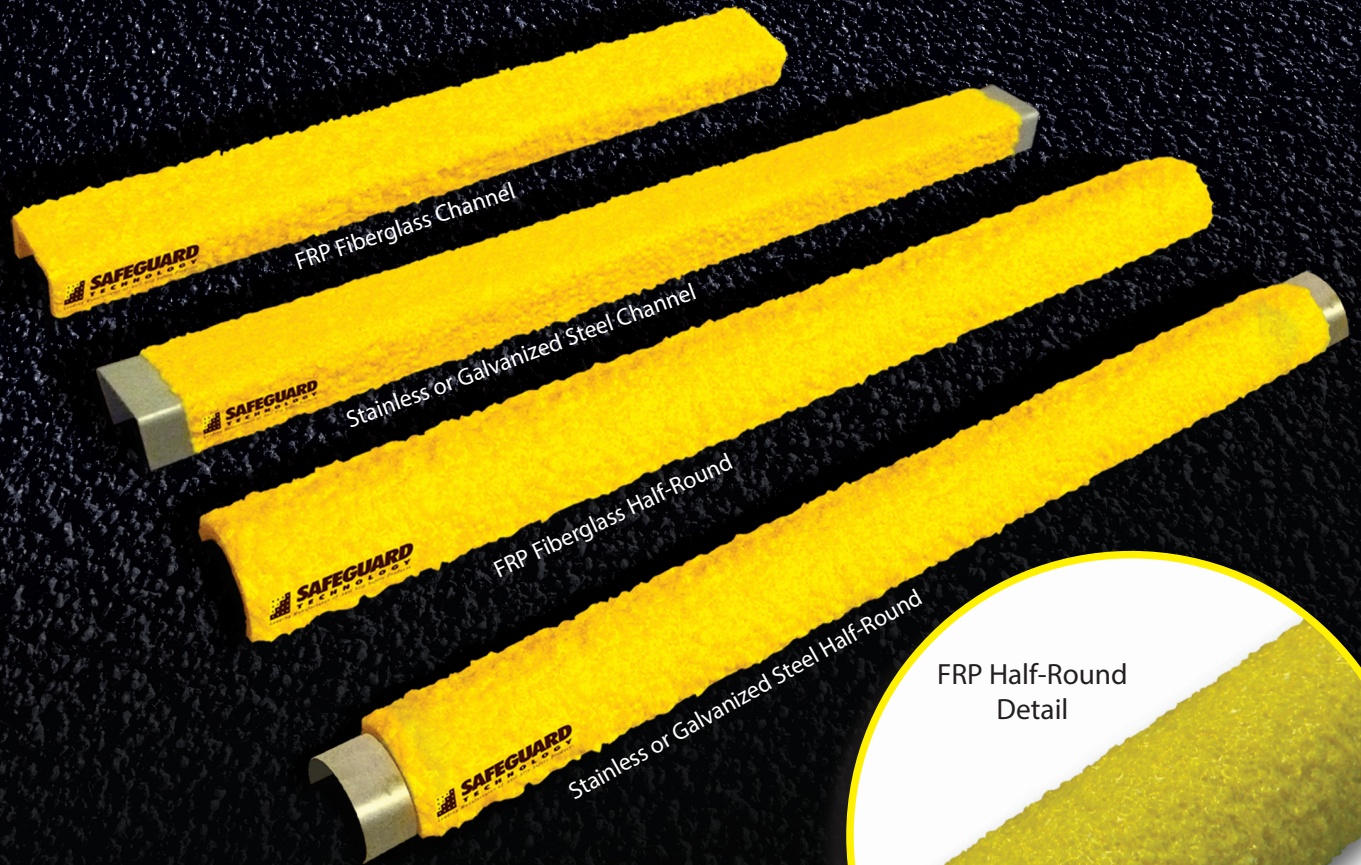

FRP Half-Round  
Detail

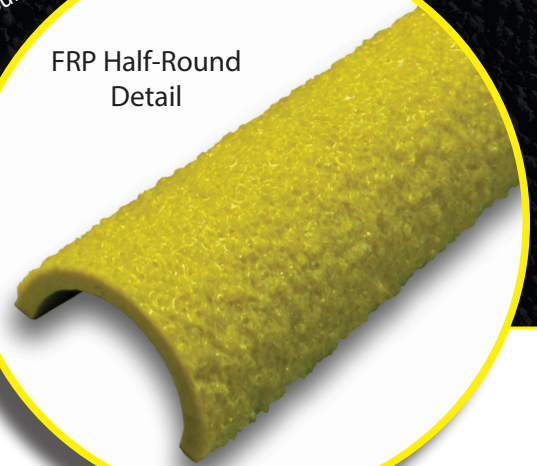

## Anti-Slip Ladder Rung Covers Prevent Costly Slips-and-Falls!

Hi-Traction® Anti-Slip Ladder Rung Covers are corrosion and impact resistant, providing years of slip prevention in a variety of environments - from offshore drilling platforms to residential applications.



# Anti-Slip Hi-Traction® LADDER RUNG COVERS

**SAFEGUARD® Hi-Traction® Ladder Rung Covers**  
Deliver firm footed traction from top to bottom.

## Ladder Rung Covers

Suitable for use indoors and out, in all types of weather and harsh conditions, our pre-fabricated Covers are resistant to impact, chemicals, and corrosives.



## Base Material Options For Your Application

Choose from one of the following base materials of construction.

- 1/8" (3mm) Pultruded FRP Fiberglass
- 18ga (1.2mm) Stainless Steel
- 18ga (1.2mm) G90 Galvanized Steel
- Customer Supplied Materials

## Base Material Shapes

Anti-Slip Ladder Rung Covers are available in two different material shapes to address your application:


- Channel
  - Half-Round
- 

## Choose Your Grade


We offer 5 different grades of grit, depending on your application. Fine grade (Commercial) is the standard choice for most ladder applications.

## Standard Dimensions, Sizes, and Colors

- Standard diameters range from 3/4" to 2"
- Custom Lengths available.
- Order in a range of standard safety colors, two-tone configurations, custom colors and photoluminescent "glow-in-the-dark" options.

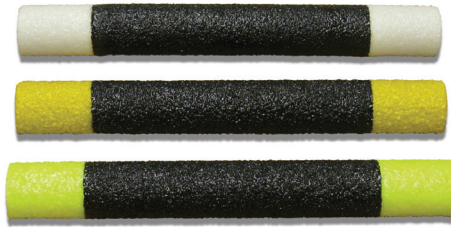

Photoluminescent "Glow-in-the-Dark" colors available

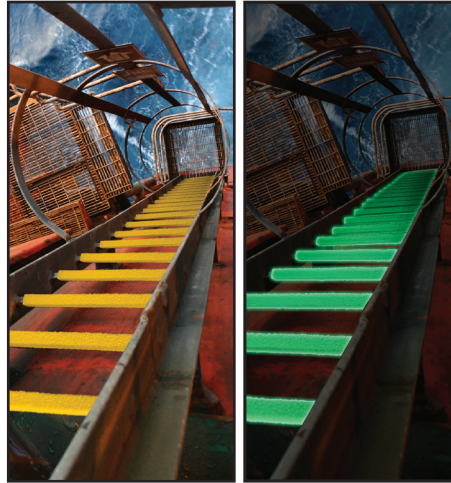

Daytime and Nighttime


## Retrofit design for easy installation

- Sikaflex 252 adhesive
- Tack welding
- Mechanical fasteners



## Direct Gritting To Your Ladder Rungs

Direct rung gritting is a cost effective option, particularly at the OEM level, when retrofit Covers are not desirable. If you have finished rungs but do not want to adhere or screw a Cover over them, rungs or assemblies can be shipped directly to Safeguard where the Anti-Slip surface is applied.

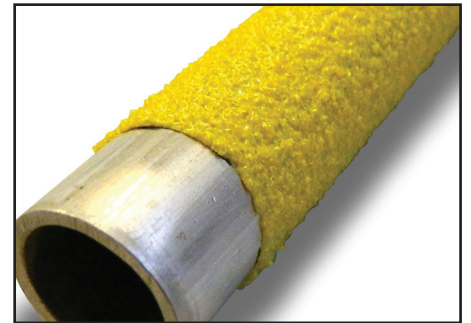

Example of Direct Gritting of customer supplied rung

Contact Safeguard Technology for more information and a free sample cover today



**SAFEGUARD TECHNOLOGY INC.**  
330.995.5200 | 1.800.989.1695 Toll-Free in the U.S. and Canada  
Email: [info@safeguard-technology.com](mailto:info@safeguard-technology.com)  
[www.safeguard-technology.com](http://www.safeguard-technology.com)

© Copyright 2016 SAFEGUARD TECHNOLOGY INC.  
SAFEGUARD® Covers, Hi-Traction®, HiGlo-Traction®, and Roll-Traction® are registered trademarks of SAFEGUARD Technology Inc. REV2\_122115

Base Material		Inches	Millimeters
Pultruded FRP Round and Channel	Lengths	Up to 48"	Up to 1,200mm
	Diameters	3/4 up to 2"	19 up to 50mm
Metal Channel	Lengths	Up to 48"	Up to 1,200mm
	Diameters	3/4 up to 2"	19 up to 50mm
Metal Round	Lengths	Up to 20"	Up to 500mm
	Diameters	Call for availability	