

# Anti-Slip Hi-Traction® VINYL (Flexible PVC) WALKWAY COVERS



## The Superior Alternative to Anti-Slip Tapes!

SAFEGUARD Vinyl (Flexible PVC) Walkway Covers are the lightweight, semi-flexible, "Peel-and-Stick" solution for eliminating Slips and Falls.



# Anti-Slip Hi-Traction® VINYL (Flexible PVC) WALKWAY COVERS

**SAFEGUARD® Hi-Traction® Vinyl Walkway Covers**  
Peel-and-Stick for fast Anti-Slip Protection.

SAFEGUARD Vinyl (Flexible PVC) Walkway Covers are a lightweight, semi-flexible, "Peel-and-Stick" alternative to our rigid FRP and steel based products. As with all Safeguard Covers, Vinyl Walkway Covers exhibit a superior coefficient of friction that exceeds both OSHA & ADA recommended levels.

## Installation

Each Cover comes standard with an Adhesive Transfer Tape laminate and mylar film backing. Simply remove the mylar and press into place for a quick, clean installation. Vinyl Walkway Covers are available without Pressure Sensitive Adhesive (PSA); however, care must be taken to choose a proper adhesive specifically designed to bond with vinyl.



\* To ensure proper adhesion, follow the detailed instructions provided in the Safeguard Installation Guide.

## Sizes

Vinyl Walkways come in sheet form with a maximum size of 48" x 48" and a minimum of 4" x 4". Choose from four grades of grit; Super Fine (Barefoot) to Coarse (Industrial). Extra Coarse (Offshore) and Super Coarse (Extreme) grades are not available on Safeguard Vinyl Walkway Covers.




## Colors

Available in all Safeguard Standard, Premium, and Glo Colors as well as two-tone configurations.


## Applications

Safeguard recommends installation over smooth surfaces such as steel, smooth concrete or painted surfaces.

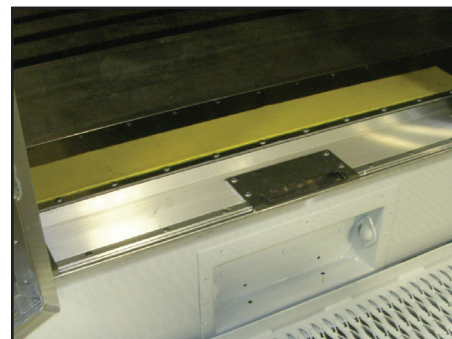

Wood is also an option however, prior testing may be necessary to ensure the chemicals in the wood do not inhibit the bond with the PSA.

The Covers are not designed for extreme angles of 90° such as steps, but have limited flexibility allowing for installation over curved surfaces such as tank tops, wheel wells or any surface that is not completely flat or have a slight radius.

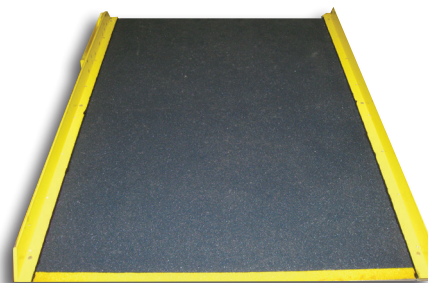

## Physical Properties and Installation

Please refer to our General Properties and Installation Insert for complete guidelines and instructions.

Contact Safeguard Technology for more information or a free sample today.



**SAFEGUARD TECHNOLOGY INC.**  
330.995.5200 | 800.989.1695 Toll-Free in the U.S. and Canada  
Email: [info@safeguard-technology.com](mailto:info@safeguard-technology.com)  
[www.safeguard-technology.com](http://www.safeguard-technology.com)

© Copyright 2016 SAFEGUARD TECHNOLOGY INC.  
SAFEGUARD® Covers, Hi-Traction®, HiGlo-Traction®, and Roll-Traction® are registered trademarks of SAFEGUARD Technology Inc. REV2\_122115

Average Thickness of Finished Product

| Grit Coarseness                      | Super Coarse | Extra Coarse | Coarse         | Fine           | Extra Fine     | Super Fine     |
|--------------------------------------|--------------|--------------|----------------|----------------|----------------|----------------|
| Vinyl (Flexible PVC)<br>0.024"/.60mm | NA           | NA           | 0.08"<br>2.1mm | 0.07"<br>1.9mm | 0.06"<br>1.6mm | 0.05"<br>1.3mm |