
Anti-Slip Hi-Traction® Walkway Covers



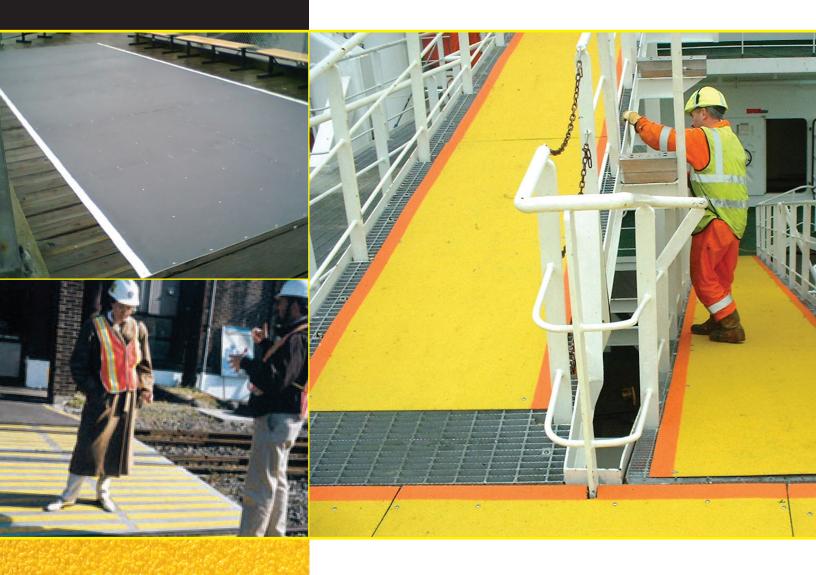

SAFEGUARD® Hi-Traction® and HiGlo-Traction® Walkway Covers are ideal for flat areas requiring Anti-Slip protection — any place you want secure footing on a high-traffic surface!

Designed with a long-lasting, aggressive gritted surface, SAFEGUARD[®] Covers offer a non-corrosive and impact-resistant, superior alternative to temporary paints and tapes.

Anti-Slip Hi-Traction® Walkway Covers

SAFEGUARD® Hi-Traction® and HiGlo-Traction® Walkway Covers Turn your Walkways into safe non-slip zones.

Design and Configuration

SAFEGUARD[®] Walkway Covers are designed specifically for flat areas and are cut to custom specifications. Covers can be configured in multiple pieces for large areas or a heel-toe-pattern to create a designated "safe walking path."



Heel-and-Toe pattern

Coefficient of Friction


Safeguard Technology's unique surface nearly doubles both the OSHA's 0.5 and the ADA's 0.6 guidelines for Coefficient of Friction values as confirmed in independent lab testing using the Mark II Model of the Brungraber slip tester. Even in wet or oily conditions, our Safety Covers greatly exceed these guidelines.

Choose Your Grade

We offer 6 different grades of grit, depending on your application. These include Super Coarse (for extreme conditions), Extra Coarse (for offshore and heavy duty use), Coarse (for industrial environments), Fine (for commercial buildings), Extra Fine (for residential steps) and Super Fine (for showers and barefoot areas).

Choose Your Colors

Select from a wide range of standard, premium, or custom colors. Please refer to our Standard and Premium Colors literature page. Custom color matching is available, please consult your Safeguard sales representative when ordering.



Photolumeniscent edging leads the way in blackouts

Glow-in-the-dark

Safeguard also offers Hi-Glo-Traction[®] Covers in photoluminescent which are visible for several hours after the light source is removed.

Two-Tone Colors Add Visibility

For added safety, our two-tone configuration calls attention to the edge of the Walkway Cover providing good definition and clear visibility. Incorporate photoluminescent edging for safe egress when the lights go out.

Applications & Benefits Any flat walkway surface can be a safe walking path.

Base Materials

- 1/8" Pultruded Rigid Fiberglass
- 1mm Molded Fiberglass
- Vinyl with ¹PSA Peel & Stick Installation
- 18 gauge (1.2mm) G90 Galvanized Steel
- 18 gauge (1.2mm) #316 Stainless Steel

Maximum Sizing

- 1/8" Pultruded FRP Maximum 4' x 8'
- 1mm Molded FRP Maximum 4' x 8'
- Steel Maximum 4' x 4'
- Vinyl Maximum 4' x 4'

Descriptive Markings and Logos

We can incorporate logos, Personal Protection Equipment (PPE) symbols, escape route information, and directional markings on our Covers. Our Safeguard Descriptive Marking is inlaid and will last the life of the product.



Corporate logos accentuate branding

Easy Installation and Cleaning

Safeguard[®] Hi-Traction[®] and HiGlo-Traction[®] Covers are not load bearing. They are prefabricated, retrofit covers which are quickly and easily installed over existing surfaces, such as concrete, wood, metal plate and grating using mechanical fasteners, adhesive or tack welding. Installation is quick, easy and requires little or no downtime. Cleanup is easy with a non-solvent cleaner and a stiff brush. Refer to our Cleaning and Installation Insert for complete details.

Physical Properties

Please refer to our General Properties Insert for complete physical properties and mechanical specifications.

Contact Safeguard Technology for more information or a free sample today.



SAFEGUARD TECHNOLOGY INC.

330.995.5200 | 800.989.1695 Toll-Free in the U.S. and Canada Email: info@safeguard-technology.com www.safeguard-technology.com

© Copyright 2016 SAFEGUARD TECHNOLOGY INC. SAFEGUARD® Covers, Hi-Traction®, HiGlo-Traction®, and Roll-Traction® are registered trademarks of SAFEGUARD Technology Inc. REV3_122115